

DOUBLE OVEN ULTRA PRECISION OXO MV360M


Features:

- Ensures TIE of <math><400\text{ nSec}</math> for 24 hours
- High stability vs. temperature: up to $\pm 3 \times 10^{-11}$
- Standard frequency: 10.0 MHz
- Standard package: 50.8x50.8x19 mm
- High long-term stability: up to $\pm 1 \times 10^{-8}$ /year
- Power supply: 5 V and 12 V
- Analog or Digital frequency control

ORDERING GUIDE: MV360M – C 003 D – 12V - 10.0M - D

Availability of certain stability vs. operating temperature range		$\pm 1 \times 10^{-10}$	$\pm 5 \times 10^{-11}$	$\pm 3 \times 10^{-11}$
		01	005	003
A	0...+55°C	A	A	A
B	-10...+60°C	A	A	A
C	-20...+70°C	A	A	A
D	-40...+70°C	A	A	A
EU*	-40...+75°C	A	A	A
EX*	-40...+85°C	A	A	A

A – available
* for 5V only

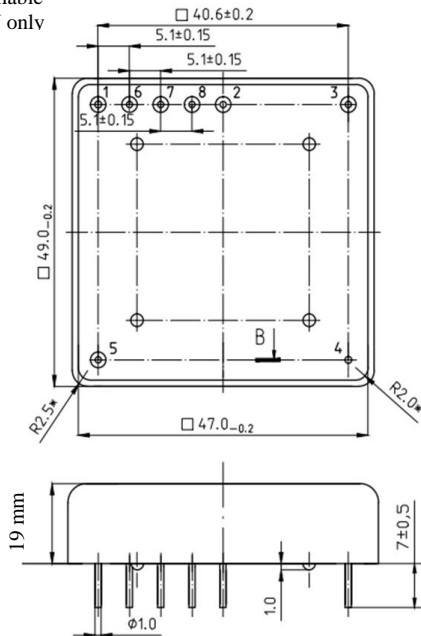

Pin	Analog	Digital
1	Control voltage Input	SDA
2	Reference voltage Output	SCL
3	RF output	RF output
4	Ground (case)	Ground (case)
5	Power supply	Power supply
6	Ground for control voltage Input	Not used
7	Not used	Not used
8	Not used	Not used

Availability of certain aging values for		10 MHz
F	$\pm 5 \times 10^{-8}$ /year	A
E	$\pm 3 \times 10^{-8}$ /year	A
D	$\pm 2 \times 10^{-8}$ /year	A
C	$\pm 1 \times 10^{-8}$ /year	A

Type of frequency control	
-	Analog frequency control
D	Digital frequency control

Phase noise, at offset, dBc/Hz		10 MHz
	1 Hz	<-100
	10 Hz	<-130
	100 Hz	<-150
	1000 Hz	<-150
	10000 Hz	<-155

Supply voltage	
	5 V
	12 V

Short term stability (Allan deviation) per 1 sec	< 2×10^{-12}	
Frequency stability vs. load changes ($\pm 5\%$)	< $\pm 1 \times 10^{-11}$	
Frequency stability vs. power supply changes ($\pm 5\%$)	< $\pm 1 \times 10^{-11}$	
Warm-up time within accuracy of $<\pm 5 \times 10^{-8}$ @ 25°C	<15 min.	
Power supply (Us)	5V $\pm 5\%$	12V $\pm 5\%$
Digital frequency control by I2C protocol		
Frequency pulling range	$\geq \pm 2.5 \times 10^{-7}$	
DAC type	LTC2606-1	
Chip address	0010000	
Analog frequency control		
Frequency pulling range	$\geq \pm 2.5 \times 10^{-7}$	
with external control voltage range	0...4,1	0...5
Reference voltage output	+4,1 V	+5 V
Steady state current consumption @ +25°C	<800 mA	<300 mA
Peak current consumption during warm-up	<2 A	<1 A

Output	SIN	
Level	>300 mV RMS	
Load	50 Ohm $\pm 5\%$	
Harmonic suppression	>30 dBc	

Vibrations:	
Frequency range	10-200 Hz
Acceleration	5 g
Shock:	75 g/ 3 ± 1 ms
Humidity @ 25 °C	98%
Storage temperature range	-55...+85°C

Additional notes:

For non-standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85

